

Data Sheet

Customer: _____

Product: Low Ohm (Metal Strip) Chip Resistor – LRP12H Series

Size: 2512

Issued Date: 19-Apr-21

Edition: REV.A



VIKING TECH CORPORATION
光頡科技股份有限公司
No.70 Guangfu N. Rd., Hukou
Township, Hsinchu County 303,
Taiwan

TEL:886-3-5972931
FAX:886-3-5972935•886-3-5973494
E-mail:sales@viking.com.tw

VIKING TECH CORPORATION KAOHSIUNG BRANCH
光頡科技股份有限公司高雄分公司
No.248-3, Sin-Sheng Rd., Cian-Jhen Dist., Kaohsiung,
806, Taiwan


TEL:886-7-8217999
FAX:886-7-8228229
E-mail:sales@viking.com.tw

VIKING ELECTRONICS (WUXI) CO., LTD.
光頡電子(無錫)有限公司
No.22 Xixia Road, Machinery & Industry Park,
National Hi-Tech Industrial Development Zone
of Wuxi, Wuxi, Jiangsu Province, China
Zip Code:214028
TEL:86-510-85203339
FAX:86-510-85203667•86-510-85203977
E-mail:china@viking.com.tw

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
19-Apr-21	19-Apr-21	19-Apr-21		
Kris Chen	Ben Chang	Ben Chang		


Low Ohm (Metal Strip) Chip Resistor- LRP12H Series

Construction

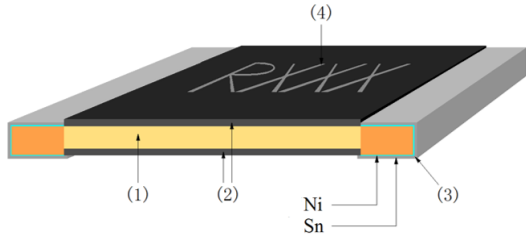


(1)	Resistive Element	(3)	Plating Layer
(2)	Protective Coating	(4)	Marking

Dimensions

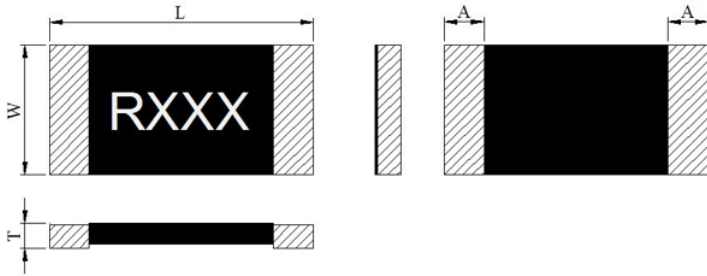

Type	Size (Inch)	Resistance (mΩ)	L (mm)	W (mm)	T (mm)	A (mm)
LRP12H (2W)	2512	0.5-0.75	6.40±0.30	3.20±0.30	1.05±0.20	1.90±0.25
		1-1.5	6.40±0.30	3.20±0.30	0.90±0.20	1.90±0.25
		2-50	6.40±0.30	3.20±0.30	0.90±0.20	0.80±0.25
LRP12H (3W)		0.5-0.75	6.40±0.30	3.20±0.30	1.05±0.20	1.90±0.25
		1-4	6.40±0.30	3.20±0.30	1.10±0.20	0.80±0.25
		5-50	6.40±0.30	3.20±0.30	0.90±0.20	0.80±0.25

Derating Curve

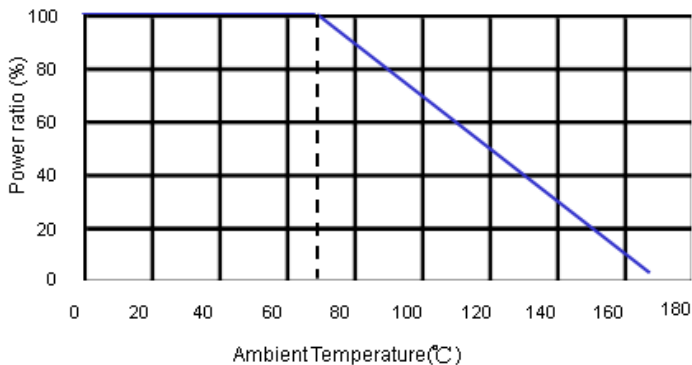

Part Numbering


LRP	12	F	T	D	S	R015	H
Product Type	Dimensions (LxW) 12: 2512	Resistance Tolerance F: ±1%	Packaging Code T: Taping Reel	TCR (PPM/°C) D: ±50 E: ±100 K: ±150	Power Rating R: 3W S: 2W	Resistance R015: 0.015Ω R050: 0.05Ω	Special Code H:LRP12H

Electrical Specifications


Type	Item	Power Rating at 70°C	Operating Temp. Range	Resistance Range (mΩ)	TCR (PPM/°C)
				±1%	
LRP12H (2512)	2W		-55 ~ +170°C	0.5, 0.75	±150
				1, 1.5	±100
				2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 15, 20, 25,30, 35, 40,50	±50
	3W		-55 ~ +170°C	0.5, 0.75	±150
				1	±100
				2, 3, 4, 5, 6, 7, 8, 9, 10, 15, 20, 25, 30, 35, 40,50	±50

■ LRP12H marking: Laser marking

Recommended Customer Soldering Parameters

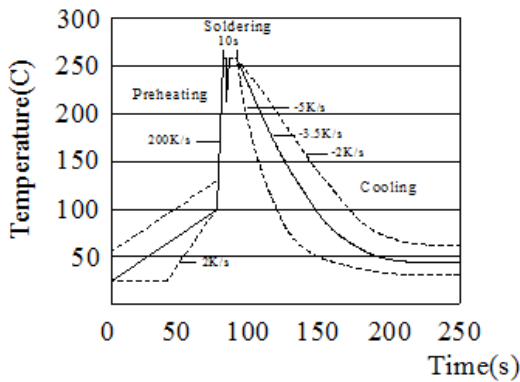

Wave Solder Temperature Condition
 Preheating: 100~130°C, max. 100sec
 Soldering: 250~265°C max. 10sec
 Maximum temperature: 260±5°C, max. 10sec

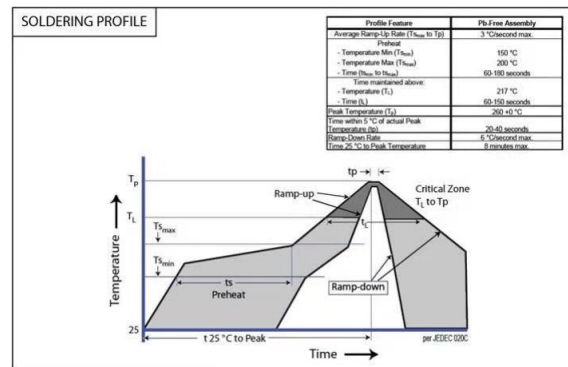

Solder Reflow Temperature Condition


■ Environmental Characteristics

Item	Requirement	Test Method
Short Time Overload	$\pm(1.0\%+0.5m\Omega)$	IEC60115-1 4.13 P=5.0Pr; t=25±2°C; t=5 sec
Endurance	$\pm(2.0\%+0.5m\Omega)$	IEC60115-1 4.25 70±2°C, Vtest=Vmax, 1000 hrs with 1.5 hrs "ON" and 0.5 hr "OFF"
Damp Heat with Load	$\pm(2.0\%+0.5m\Omega)$	IEC60115-1 4.25 60±2°C, Vtest=Vmax, 1000 hrs with 1.5 hrs "ON" and 0.5 hr "OFF"
High Temperature Exposure	$\pm(1.0\%+0.5m\Omega)$	IEC60115-1 4.25 +170±2°C for 1000 hrs
Bending Strength	$\pm(1.0\%+0.5m\Omega)$	IEC-60115-1 4.33 Span between fulcrums: 90mm ; Bend width: 2mm Test board: glass-epoxy board ; Thickness: 1.6mm
Solderability	95% min. coverage	IEC-60115-1 4.17 245±5°C for 3±0.5 seconds
Resistance to Soldering Heat	$\pm(1.0\%+0.5m\Omega)$	IEC-60115-1 4.18 Through Reflow,3times, 260±5°C for 20±1 seconds
Thermal Shock	$\pm(1.0\%+0.5m\Omega)$	IEC-60115-1 4.19 -55°C to +155°C, 100 cycles
Low Temperature Storage	$\pm(1.0\%+0.5m\Omega)$	IEC60115-1 4.25 -55±2C for 1000 hrs
Mechanical Shock	$\pm(1.0\%+0.5m\Omega)$	IEC60115-1 4.21 a=100G, t=6ms

Low Ohm (Metal Strip) Chip Resistor


■ Packaging

Reel Specifications & Packaging Quantity

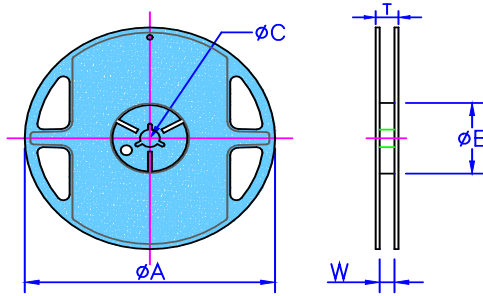

Type	Resistance (mΩ)	Packaging Quantity	Tape Width	Reel Diameter	ΦA (mm)	ΦB (mm)	ΦC (mm)	W (mm)	T (mm)
LRP12H (2W)	0.5-0.75	Embossed 3K	12mm	7 inch	178.0±5.0	60±2.0	13.0±0.5	13.0±1.0	15.5±0.5
	1.5-50	Embossed 4K	12mm	7 inch	178.0±5.0	60±2.0	13.0±0.5	13.0±1.0	15.5±0.5
LRP12H (3W)	0.5-4	Embossed 3K	12mm	7 inch	178.0±5.0	60±2.0	13.0±0.5	13.0±1.0	15.5±0.5
	5-50	Embossed 4K	12mm	7 inch	178.0±5.0	60±2.0	13.0±0.5	13.0±1.0	15.5±0.5

Embossed Plastic Tape Specifications

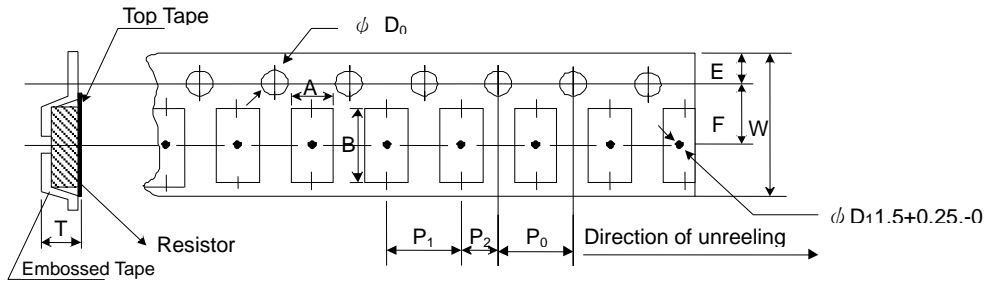


For 2W

Type	A (mm)	B (mm)	W (mm)	E (mm)	F (mm)	P ₀ (mm)	P ₁ (mm)	P ₂ (mm)	ΦD ₀ (mm)	T (mm)
LRP12H (0.5-0.75 mΩ)	3.40±0.20	6.75±0.20	12.0±0.30	1.75±0.10	5.5±0.05	4.00±0.10	4.00±0.10	2.00±0.10	1.55±0.10	1.50+0.2/-0.1
LRP12H (1-50 mΩ)	3.40±0.20	6.75±0.20	12.0±0.30	1.75±0.10	5.5±0.05	4.00±0.10	4.00±0.10	2.00±0.10	1.55±0.10	1.20±0.2

For 3W

Type	A (mm)	B (mm)	W (mm)	E (mm)	F (mm)	P ₀ (mm)	P ₁ (mm)	P ₂ (mm)	ΦD ₀ (mm)	T (mm)
LRP12H (0.5-4 mΩ)	3.40±0.20	6.75±0.20	12.0±0.30	1.75±0.10	5.5±0.05	4.00±0.10	4.00±0.10	2.00±0.10	1.55±0.10	1.50+0.2/-0.1
LRP12H (5-50 mΩ)	3.40±0.20	6.75±0.20	12.0±0.30	1.75±0.10	5.5±0.05	4.00±0.10	4.00±0.10	2.00±0.10	1.55±0.10	1.20±0.2

■ Recommend Land Pattern

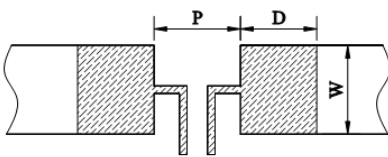

Type	Resistance (mΩ)	P (mm)	W (mm)	D (mm)
LRP12H (2W)	0.5-1	1.50	3.57	2.95
	2-50	3.18	3.57	2.11
LRP12H (3W)	0.5-0.75	1.50	3.57	2.95
	1-50	3.18	3.57	2.11